



JDG Series AGM-GEL battery

JDG12-70


General Features

- Nanosilica colloidal electrolyte and high tin positive plate alloy design to enhance battery performance
- Relatively rich electrolyte, high temperature and low temperature performance is superior
- Long cycle life, excellent deep cycle discharge ability
- Excellent charge acceptance ability
- Precision sealing technology
- Long life



Dimension: 258(L) × 168(W) × 208(H) × 211(TH)

Unit: mm

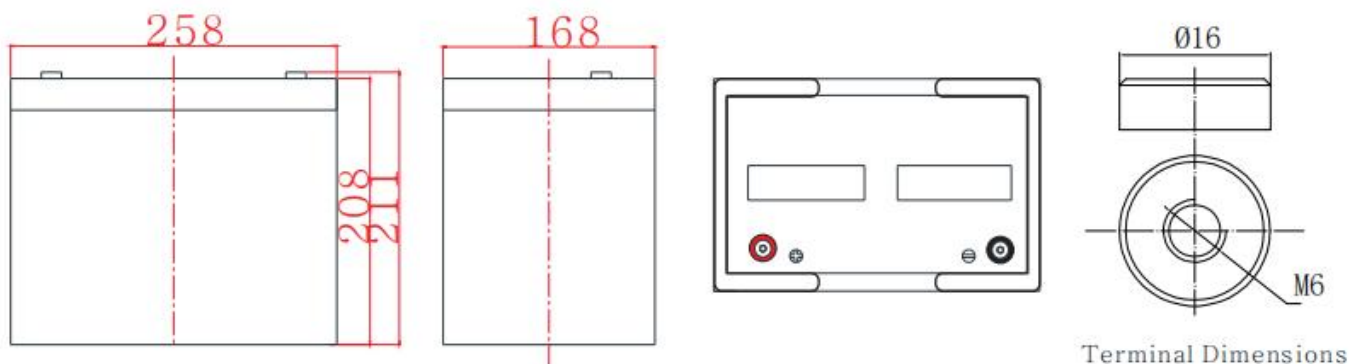

Specification

Nominal Voltage	12V
Nominal Capacity	70Ah
Design life	10 years
Terminal	M6
Approx. Weight	Approx 22.5kg (49.6lbs)
Container Material	ABS
short-circuit current	1818A
Internal resistance(Full charged at 25°C:)	6.6 mΩ
Self discharge	3% of capacity declined per month at 25°C

Operating Temperature

Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)

Charge Method(25 °C)

Charge current:	Max. 17.5A; Recom. 7.0A
Float charge: 13.5-13.8V	recom. 13.8V(-18mV/ °C)
Equalize charge: 13.8-14.1V	recom. 14.1V(-24mV/ °C)
Cycle charge: 14.4-15.0V	recom. 14.7V(-30mV/ °C)

Standards

Executive standard YD/T 799-2010

Applications

- UPS/EPS
- Power systems
- Telecommunications system
- Emergency lighting, Auto control system
- Solar/wind generating storage cyclic
- Other general purpose

Rated Capacity


10Hour Rate (7.00A to 10.8V)	70.0Ah
3Hour Rate (19.1A to 10.2V)	57.3Ah
1Hour Rate (47.1A to 9.6V)	47.1Ah

Attain Certificate


			RoHS

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.


Discharge characteristic

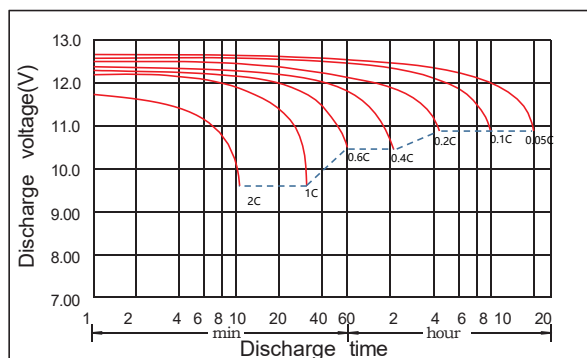


Charging characteristic

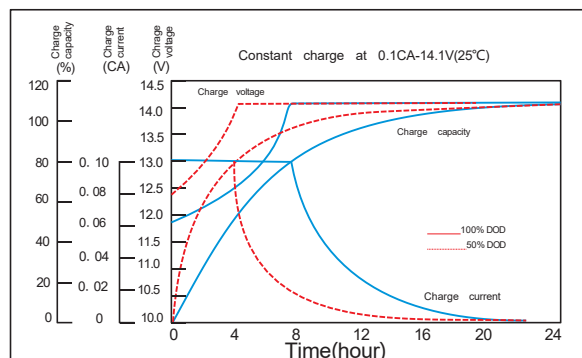

The effect of temperature on capacity

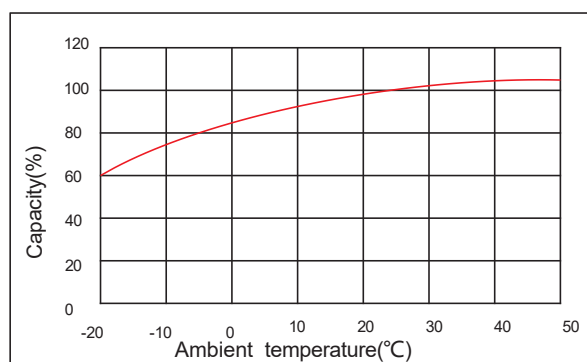

The effect of discharge depth on cycle life

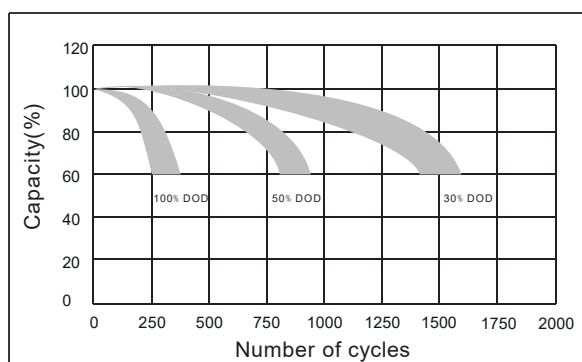

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	247	164	133	80.6	57.8	47.1	29.6	27.0	19.6	14.2	13.2	10.5	8.65	7.28	3.82
1.65V	239	163	128	79.2	57.5	46.9	29.3	26.9	19.4	14.1	13.0	10.4	8.58	7.21	3.80
1.70V	230	162	126	77.9	57.0	46.5	29.0	26.7	19.1	13.9	12.9	10.3	8.51	7.14	3.78
1.75V	211	159	122	77.2	56.2	45.8	28.8	26.3	18.9	13.8	12.8	10.2	8.44	7.07	3.77
1.80V	189	156	113	73.8	54.8	44.7	28.5	25.8	18.8	13.7	12.4	10.1	8.37	7.00	3.75
1.85V	169	144	101	67.4	50.8	41.4	27.6	24.5	17.7	13.2	11.8	9.79	8.02	6.79	3.68

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	414	278	233	146	107	89.1	59.1	51.1	37.3	28.0	25.0	20.5	16.8	14.0	7.56
1.65V	398	276	229	144	106	88.4	58.7	51.0	36.8	27.8	24.8	20.4	16.7	13.9	7.53
1.70V	396	274	227	144	105	87.7	57.8	50.8	36.6	27.4	24.6	20.1	16.6	13.7	7.49
1.75V	369	272	225	144	105	87.1	57.4	50.5	36.4	27.2	24.5	19.9	16.5	13.6	7.46
1.80V	339	270	213	140	104	86.4	56.5	50.4	36.3	26.8	24.2	19.7	16.3	13.4	7.42
1.85V	303	250	190	129	96.2	80.2	55.7	48.1	34.5	26.4	23.1	19.4	15.8	13.2	7.35